

xPAR™-30L

Ultra-Light, NON-DIMMABLE



xPAR-30L



PRODUCT SUMMARY

- Fixed Wattage
- Non-Dimmable
- Multiple Color Temperatures Available
- Custom Optics
- High Color Rendering
- Proprietary Crimpfin Heatsink Design
- 50,000 hour life, 5 year warranty
- Halogen PAR form factor (ANSI compliant)
- No UV or IR radiation
- Voltage: 120v - 220v
- 0.9 Power Factor
- Socket Type: Medium Screw Base
- Environment: Dry
- Length: 4.6 in, 117cm
- Diameter: 3.75 in, 95mm
- Weight: 7.05 ounces, 200g
- Operating Temperature -20° C + 45° C

The high power xPAR30L™ lamps from MSi are 12W fixed LED replacement bulbs, exceeds the light output of a 75-watt halogen PAR lamp. This amazing lamp brings together the latest innovation and experience from MSi's multiple engineering disciplines to deliver the complete solution for retail, hospitality, furniture, museum and commercial applications.



120~
220~
MEDIUM
2700K
3000K
4000K
15°
25°
UV
UV

Catalog#	Power	CCT (K)	CRI	Beam Angle	Lumens	CBCP
xPAR30L271512T3N	12W	2700	82	15°	760	8,360
xPAR30L272512T3N				25°		3,268
xPAR30L301512T3N	12W	3000	82	15°	820	9,000
xPAR30L302512T3N				25°		3,525
xPAR30L401512T3N	12W	4000	82	15°	880	9,680
xPAR30L402512T3N				25°		3,784




xPAR™-30L


CANDELA DISTRIBUTION

15°

3000K

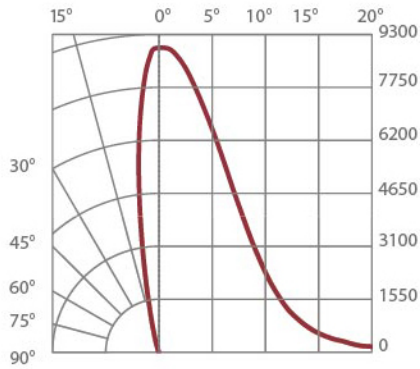

BEAM DISTRIBUTION


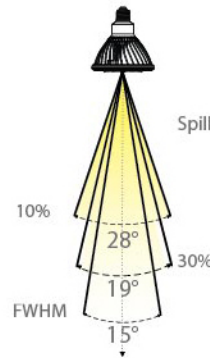


0° AIMING FOOTCANDLES

Distance To Floor	Beam Diameter (50% CBCP)	Footcandles On Floor
5'	1.3'	360
10'	2.6'	90
15'	3.9'	40
20'	5.3'	23

25°

3000K

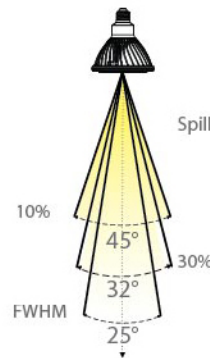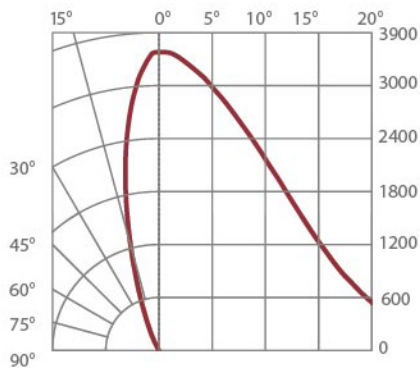

Distance To Floor	Beam Diameter (50% CBCP)	Footcandles On Floor
5'	2.2'	141
10'	4.4'	35
15'	6.7'	16
20'	8.9'	9

CAUTION: Risk of electric shock. Do not open - no user serviceable parts inside. Use in dry locations only. Turn power off before inspection, installation, or removal. Not intended for use with emergency exit fixtures or emergency exit lights. Not for use where exposed to the weather. Not for use with totally enclosed fixtures or fixture that inhibit air flow.

WARRANTY - This product is covered by a 5 year limited warranty under normal operating conditions based on 12 hours of usage per day. For details please visit www.msissl.com/warranty.html